

OUR STORY

As a family business, Southwire proudly continues building on our commitment to environmental stewardship and corporate sustainability by prioritizing stakeholder expectations, and supporting the wellbeing of our communities and the environment in which we live. To help us meet this commitment, we organize our sustainability strategy around five core tenets: Growing Green, Living Well, Giving Back, Doing Right, and Building Worth.

We Deliver Power...Responsibly®

We remain committed to the sustainability of our company for the next 100 years and beyond. As we strengthen this commitment, we continue to work hard every day to discover, develop and distribute sustainable solutions that exceed the expectations of our stakeholders around the world.

OUR MISSION

To be a preferred provider of solutions to the electrical industry by providing innovative products and services with exceptional quality.

OUR VALUES

Our **ONE Southwire** culture prioritizes the interests of our team members, customers, and communities through a continuous commitment to empowerment, trust, consistency, and inclusion.

OUR REACH

Nearly one in two new homes built in the United States contains our wire, and we produce half of the cable used to transmit and distribute electricity throughout the nation.

OUR PRODUCTS

Our product teams and dedicated resources work together to listen to and work with our customers, creating solutions that deliver unparalleled value through product innovation, safety, and efficiency.

OUR SERVICE

Service is more than a word or a phone number; it's a tangible support system that assists you through the entire project cycle; from our knowledgeable customer service team, to our experienced field sales team, we're there every step of the way.

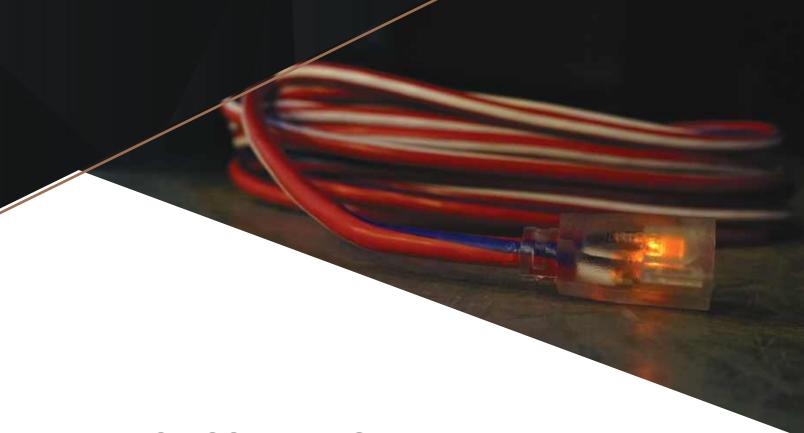


TABLE OF CONTENTS

OUTDOOR CORDS

| OUIDOUII OUIIDO | |
|------------------------------|----|
| Standard1 | 4 |
| Red, White, & Blue1 | 7 |
| Tri-Tap1 | 8 |
| 20A 5-202 | 20 |
| Heavy Duty2 | 21 |
| Multi-Outlet2 | |
| Push-Lock2 | 23 |
| | |
| COLD WEATHER CORDS | |
| Polar Solar® Supreme2 | 28 |
| Polar Solar®2 | 29 |
| Cold Flex™3 | 32 |
| | |
| TWIST LOCK & GENERATOR CORDS | |
| Twist Lock3 | |
| Generator Cords3 | 37 |
| Generator Adapters 3 | 88 |

SPECIALTY CORDS

| Royal® Welding Cords | 43 |
|------------------------------|----|
| Oil Resistant Agripro™ Cords | 46 |
| Convention Center Cords | 48 |
| | |
| RANGE, DRYER AND APPLIANCE | |
| Range & Dryer | 50 |
| Replacement | 51 |
| Appliance | 53 |
| | |
| CORD MANAGEMENT AND REELS | |
| Storage | 55 |
| Reels | 56 |

Retractable Reels57



16 GAUGE

LIGHT DUTY

SUGGESTED USE



2-PRONG FANS SMALL APPLIANCES STEREOS 3-PRONG SPACE HEATERS HEDGE TRIMMERS JIG SAWS

AMP RATINGS


13 10 AMPS AMPS 25' 50' 100'





14 GAUGE MEDIUM DUTY

SUGGESTED USE



DRILLS BELT SANDERS ROUTERS

AMP RATINGS

 15
 15

 AMPS
 13

 25'
 50'

 100'





THE GAUGE OF AN EXTENSION CORD DETERMINES HOW MUCH ELECTRICITY IT CAN CARRY




THE SMALLER THE NUMBER OF THE GAUGE, THE MORE ELECTRICITY IT CAN CARRY



12 GAUGE

HEAVY DUTY

SUGGESTED USE



CIRCULAR SAWS GRINDERS TABLE SAWS

AMP RATINGS

15 AMPS 15 AMPS 25' 50' 100'






10 GAUGE

EXTRA HEAVY DUTY

SUGGESTED USE



GENERATORS COMPRESSORS ROTARY HAMMERS

AMP RATINGS

20 20 20 AMPS 25' 50' 100'






USING A LARGE NUMBER GAUGE CORD ON A HIGH-POWER PRODUCT LIKE A SAW, COULD RESULT IN DAMAGE OF A SAW

DECODING JACKET TYPES

| S | EXTRA HARD SERVICE 600V (if not followed by J, V, or P) |
|-------------|---|
| J | HARD SERVICE 300V |
| V | VACUUM CLEANER CORD (also light duty cable) |
| P | PARALLEL CORD (also known as zip cord) - Always light duty |
| E | THERMOPLASTIC ELASTOMER (UL/NEC designation ONLY) |
| 0 | OIL RESISTANT* |
| T | THERMOPLASTIC |
| W | OUTDOOR Includes sunlight resistant jacket and wet location rated conductors (formerly "W-A") |
| H | HEATER CABLE |
| V W 1 | FLAME RETARDANT (Vertical Specimen Flame Test) |
| F T 2 | FLAME RETARDANT (Horizontal Specimen Flame Test) |

*When only one "0" appears in a classification (i.e. SJEOW), only the outer jacket material is oil resistant. If two "0's" are in the classification (i.e. SEOOW), the insulation covering the conductors and the outer jacket insulation are both oil resistant.

NEMA CONFIGURATIONS

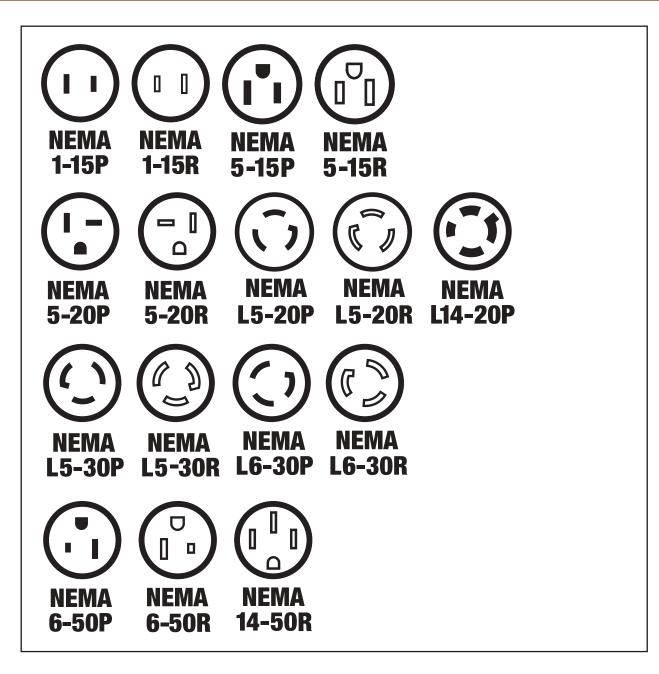


NEMA connectors are power plugs and receptacles used in North America and other countries that follow the National Electrical Manufacturers Association's guidelines. NEMA wiring systems have current ratings ranging from 15 to 60 amps (A) and voltage ratings ranging from 125 to 600 volts (V). Non-interchangeable connectors are made up of different combinations of contact blade widths, shapes, orientations, and dimensions that are specific to each voltage, electric current carrying power, and grounding method.

INKJET CORDS



Southwire's inkjet extension cords allow the user to put custom text printed on extension cord jacket to call out ownership, purpose, storage location, or even advertising. Inkjet is the fastest method to get a custom extension cord with the lowest purchase quantity.





OPTIONS:

- Available in 4 high-viz colors: PINK, BLUE, YELLOW, AND GREEN
- Available in black ink only
- 12 Gauge
- 50' or 100'
- SJTW Jacket (-40°F to 140°F) and SJEOW Jacket available in yellow only (-58° F to 221°F)

TURN AROUND:

4-6 Weeks

MINIMUM RUN:

2,400' - 5,600'

If you need more than 5,600' please use the Standard Custom Cord form

HOW TO ORDER: WWW.SOUTHWIRE.COM/CUSTOM-EXTENSION-CORDS


CUSTOM CORDS

Southwire custom cords allow you to create the perfect cord for your needs. These cords are all UL listed with molded connectors and are fully customizable.

OPTIONS:

- 14-10 gauge
- Outlet options: 5-15, L5-20, Tritap
- SJTW, SJEOW, STW, SEOW, and Low Temp SJTW
- 900 color combinations possible due to Color and Stripe Options
- Printed custom text options
- Any length available

CORD SET TYPE:

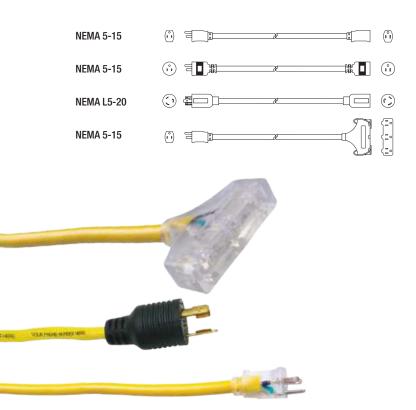

LEAD AROUND:

6-8 Weeks

MINIMUM RUN:

10,000' 14/3 5,000' MOQ is available at 20% surcharge (10/3 & 12/3)

COLORS:



Talk to your Southwire sales team about other opportunities to get the cords configurations you need.

HOW TO ORDER: WWW.SOUTHWIRE.COM/CUSTOM-EXTENSION-CORDS










OUTDOOR EXTENSION CORDS

Southwire Outdoor Extension Cords are perfect for a wide range of outdoor applications. These cords come in a wide range of colors to increase visibility and prevent jobsite loss.



OUTDOOR EXTENSION CORDS

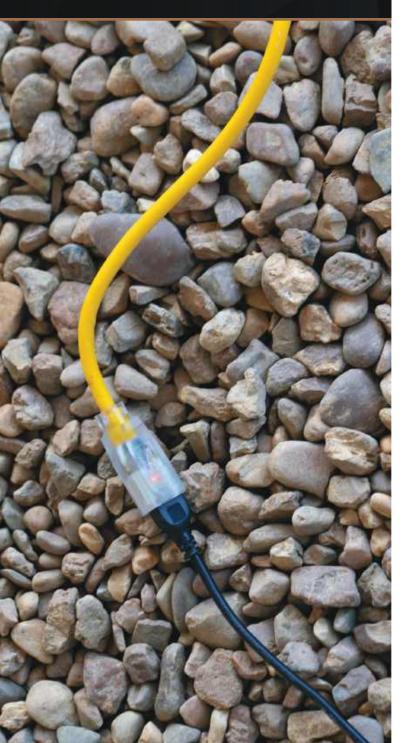

STANDARD OUTDOOR



JACKET MATERIAL

PVC

JACKET TYPE

SJTW, SJOW, SJTOW, STW

APPLICATION

GENERAL OUTDOOR USE

TEMPERATURE RANGE

-40°F TO 140°F (-40°C TO 60°C)



HEAVY DUTY OUTDOOR



JACKET MATERIAL

PVC

JACKET TYPE

STW

APPLICATION

THICKER JACKET THAN A STANDARD OUTDOOR CORD FOR INCREASED DURABILITY

TEMPERATURE RANGE

-40°F TO 140°F

(-40°C TO 60°C)





JACKET MATERIAL

PVC

JACKET TYPE

SJTW

APPLICATION

PLUGS & RECEPTACLE NEMA CONFIGURATIONS ARE HIGH AMPERAGE APPLICATIONS TYPICAL OF TEMP POWER & GENERATORS

TEMPERATURE RANGE

-40°F TO 140°F



STANDARD OUTDOOR EXTENSION CORDS WITH LIT ENDS

2487SW8804



Southwire outdoor extension cords are perfect for a variety of outdoor applications. These cords come in a variety of colors to increase visibility and prevent jobsite loss.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 voltage rating
- Common applications: electric push mower, pressure washer, electric drill






NEMA 5-15R

NEMA 5-15P

| | | | | | | | 0 1011 0 101 | | | | | | | | | | |
|------------|--------------------|----------------|-------------|-------------------|---------------------------|-----------|-----------------------|--|--|--|--|--|--|--|--|---------------|--|
| STOCK # | GAUGE CONDUCTOR | JACKET TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY | | | | | | | | | | |
| 540836 | | STW | 3' | 0.9 m | Red/Black | | 12 | | | | | | | | | | |
| 541901 |] [| | 22' | 7 m | Red/Black | | 6 | | | | | | | | | | |
| 2487SW8804 | 14/3 | Ī | 25' | 7.6 m | Red | 15 | 12 | | | | | | | | | | |
| 2488SW8804 | | | | | Red | | 6 | | | | | | | | | | |
| 541902 | 14/3 | | 50' | 15.2 m | Red/Black | | 5 | | | | | | | | | | |
| 54800401 |] | | | | Neon Pink | 13 | 13 | | | | | | | | | | |
| 2489SW8804 | | | 100' | 30.5 m | Red | 13 | 6 | | | | | | | | | | |
| 541909 | | | | | Red/Black | | 3 | | | | | | | | | | |
| 2577SW000H | | | | | Neon Blue | | | | | | | | | | | | |
| 2577SW000X | | | | | Neon Green | | | | | | | | | | | | |
| 547703 |] | 25' 7.6 m | 7.6 m | Dark Green/Yellow | | 12 | | | | | | | | | | | |
| 2577SW000A | | | | Neon Pink | | | | | | | | | | | | | |
| 2587SW8802 | | | | | Yellow | | | | | | | | | | | | |
| 2578SW000H | | | SJTW | | | Neon Blue | | | | | | | | | | | |
| 2548SW0064 | | | | | | | Neon Blue/Red | | | | | | | | | | |
| 2548SW00HX | | | | | Neon Blue/ Neon Green | 15 | | | | | | | | | | | |
| 2548SW0052 | 12/3 | | | | Dark Green/Yellow | | | | | | | | | | | | |
| 2548SW0054 |] | | | | Lime Green/Red | | | | | | | | | | | | |
| 2578SW000X |] | | | | Neon Green | | _ | | | | | | | | | | |
| 2548SW003V |] | | 50' | 15.2 m | Neon Orange/ Neon Blue | | 8 | | | | | | | | | | |
| 2578SW000A |] | | | | Neon Pink | | | | | | | | | | | | |
| 2548SW0077 | | | | | Neon Pink/ Lime Green | - | | | | | | | | | | | |
| 2548SW0041 | | | | | Red/White | | | | | | | | | | | | |
| 2588SW0002 | | | | | Yellow | | | | | | | | | | | | |
| 2548SW0022 | | | | | | | | | | | | | | | | Yellow/Purple | |
| 25850002 | 12/3 | SJTW | 80' | 24.4 m | Yellow | 15 | 4 | | | | | | | | | | |

| STOCK # | GAUGE CONDUCTOR | JACKET TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY | | | | | | | | | | | | | | | | |
|------------|--------------------|----------------|-------------|------------|---------------------------|------|-----------------------|--|--|--|---|--|---|--|---|--|--|--|-----|-------|--------|--|---|
| 2549SW0064 | | | | | Neon Blue/Red | | | | | | | | | | | | | | | | | | |
| 2579SW000H |] | | | | Neon Blue | | | | | | | | | | | | | | | | | | |
| 2549SW0054 |] | | | | Lime Green/Red | | | | | | | | | | | | | | | | | | |
| 2579SW000X |] | | | | Neon Green | | | | | | | | | | | | | | | | | | |
| 2549SW0052 |] | | | | Dark Green/Yellow | | | | | | | | | | | | | | | | | | |
| 2549SW003V | 12/3 | | 100' | 30.5 m | Neon Orange/ Neon Blue | | 4 | | | | | | | | | | | | | | | | |
| 2549SW0077 | | | ıtw | | Neon Pink/ Lime Green | 15 | | | | | | | | | | | | | | | | | |
| 2579SW000A | | | | | Neon Pink | | | | | | | | | | | | | | | | | | |
| 2549SW0041 | : | SJTW | | | Red/White | | | | | | | | | | | | | | | | | | |
| 2549SW0022 | | | | | Yellow/Purple | | | | | | | | | | | | | | | | | | |
| 2589SW0002 |] | | | | Yellow | | | | | | | | | | | | | | | | | | |
| 2687SW0002 | | | | | | | | | | | ı | | _ | | - | | | | 25' | 7.6 m | Yellow | | 6 |
| 26480064 | 1 | | | | Neon Blue/Red | | | | | | | | | | | | | | | | | | |
| 26480054 | 1 | | 50' | 15.2 m | Lime Green/Red | | 4 | | | | | | | | | | | | | | | | |
| 2688SW0002 | 10/3 | | | | Yellow | | | | | | | | | | | | | | | | | | |
| 26490064 | | | | | Neon Blue/Red | | | | | | | | | | | | | | | | | | |
| 26490054 | 1 | | 100' | 30.5 m | Lime Green/Red | | 3 | | | | | | | | | | | | | | | | |
| 2689SW0002 | 1 | | | | Yellow | | | | | | | | | | | | | | | | | | |













STANDARD OUTDOOR EXTENSION CORDS WITH NON-LIT ENDS



Southwire outdoor extension cords are perfect for a variety of outdoor applications. These cords come in a variety of colors to increase visibility and prevent jobsite loss.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 voltage rating
- · Common applications: electric push mower, pressure washer, electric drill









NEMA 1-15R

NEMA 1-15P

NEMA 5-15R

NEMA 5-15P

| STOCK # | GAUGE CONDUCTOR | JACKET TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY |
|------------|-----------------|----------------|-------------|------------|------------|------|-----------------------|
| 22078803 | | | 25' | 7.6 m | | 13 | 12 |
| 22088803 | 16/2 | | 50' | 15.2 m | Orange | 13 | 6 |
| 22098803 | | | 100' | 30.5 m | | 10 | 6 |
| 2211SW8808 | | | 10' | 3 m | Black | | 24 |
| 2304SW8803 | | | 10' | 3 m | Orange | | 24 |
| 2306SW8808 | | | 15' | 4.6 m | Black | 13 | 18 |
| 2305SW8803 | 16/3 | | 15' | 4.6 m | Orange | | 18 |
| 2307SW8803 | | SJTW | 25' | 7.6 m | | | 12 |
| 2308SW8803 | | | 50' | 15.2 m | | | 12 |
| 2309SW8803 | | | 100' | 30.5 m | | 10 | 6 |
| 2407SW8804 | | | 25' | 7.6 m | | 15 | 12 |
| 2408SW8804 | 14/3 | | 50' | 15.2 m | Red | 15 | 6 |
| 2409SW8804 | 1 1/0 | | 100' | 30.5 m | | 13 | 6 |
| 517 | 10/3 | | 50' | 15.2 m | Orango | 15 | 2 |
| 518 | 10/3 | | 100' | 30.5 m | Orange | 15 | 2 |





RED WHITE AND BLUE EXTENSION CORDS WITH LIT ENDS



Southwire outdoor extension cords are perfect for a variety of outdoor applications. These cords come in a variety of colors to increase visibility and prevent jobsite loss.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 voltage rating
- Common applications: electric push mower, pressure washer, electric drill







NEMA 5-15R


NEMA 5-15P

SPECIFICATIONS

| STOCK # | GAUGE CONDUCTOR | JACKET TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY |
|------------|--------------------|----------------|-------------|------------|----------------|------|-----------------------|
| 2547SWUSA1 | | | 25' | 7.6 m | | 15 | 12 |
| 2548SWUSA1 | 12/3 | 12/3 SJTW | 50' | 15.2 m | Red/White/Blue | | 8 |
| 2549SWUSA1 | | | 100' | 30.5 m | | | 4 |







TRITAP OUTDOOR EXTENSION CORDS WITH LIT ENDS



Southwire outdoor extension cords are perfect for a variety of outdoor applications. These cords come in a variety of colors to increase visibility and prevent jobsite loss.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 voltage rating
- Common applications: electric push mower, pressure washer, electric drill






NEMA 5-15R

NEMA 5-15P

| STOCK # | GAUGE CONDUCTOR | JAKCET TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY |
|------------|--------------------|----------------|-------------|------------|------------|------|-----------------------|
| 540835* | 14/3 | STW | 3' | 0.9 m | Red | | 6 |
| 4187SW8802 | | 25' 7.6 m | | 12 | | | |
| 4188SW8802 | 12/3 | | 50' | 15.2 m | | 15 | 6 |
| 4189SW8802 | | SJTW | 100' | 30.5 m | Yellow | 15 | 4 |
| 4388SW8802 | 10/3 | 10/0 | 50' | 15.2 m | | | 4 |
| 4389SW8802 | | 0/3 | 100' | 30.5 m | | | 3 |







OUTDOOR CORDS | TRITAP CORDS

OUTDOOR CORDS

TRITAP OUTDOOR EXTENSION CORDS WITH NON-LIT ENDS



Southwire outdoor extension cords are perfect for a variety of outdoor applications. These cords come in a variety of colors to increase visibility and prevent jobsite loss.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 voltage rating
- Common applications: electric push mower, pressure washer, electric drill





NEMA 5-15R

5-15P

* Black plugs

| STOCK # | GAUGE CONDUCTOR | JACKET TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY | | | | | | | |
|------------|--------------------|----------------|-------------|------------|------------|--------|-----------------------|-------|--------------|-----|--------|-----|--|---|
| 4004SW8803 | | | 6' | 1.8 m | Orange | | 18 | | | | | | | |
| 4217SW8804 | 14/2 | 14/3 SJTW | SJTW | 25' | 7.6 m | | 15 | 12 | | | | | | |
| 4218SW8804 | 14/3 | 331W | 301W | 331W | 0011 | 331W | 3311 | 00111 | 331 W | 50' | 15.2 m | Red | | 6 |
| 4219SW8804 | | | | 100' | 30.5 m | | 13 | 6 | | | | | | |
| 4112SW8802 | 12/3 | STW | STW | 2' | 0.6 m | Yellow | 15 | 12 | | | | | | |
| 19100002* | | SJTW | 25' | 7.6 m | Tellow | 15 | 12 | | | | | | | |





20A 5-20 EXTENSION CORD



Southwire outdoor extension cords are perfect for a variety of outdoor applications. These cords come in a variety of colors to increase visibility and prevent jobsite loss.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 voltage rating
- Common applications: electric push mower, pressure washer, electric drill





NEMA 5-15R

NEM/ 5-151

| STOCK # | GAUGE CONDUCTOR | JACKET TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY |
|----------|--------------------|----------------|-------------|------------|------------|------|---------------------------------------|
| 26188802 | 10/2 | SJTOW | 50' | 15.2 m | Yellow | 20 | 2 |
| 65038701 | 10/3 | 2310W | 50 | 15.2 III | Black | 20 | \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ |







HEAVY DUTY OUTDOOR EXTENSION CORD



Southwire heavy-duty extension cords have a thicker jacket than standard outdoor cords to withstand common jobsite wear and tear.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 voltage rating
- . Common applications: table saw, heat gun, work light





| STOCK # | GAUGE CONDUCTOR | JACKET TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY |
|------------|--------------------|----------------|----------------------------------|------------|------------|------|-----------------------|
| 2457SW0003 | | | 25' | 7.6 m | _ | 15 | 6 |
| 2458SW0003 | 14/3 | | 50' | 15.2 m | | 15 | 4 |
| 2459SW0003 | | STW | STW 100' 30.5 m Orange 25' 7.6 m | CTW/ | | 13 | 3 |
| 2557SW0003 | | | | | 6 | | |
| 2558SW0003 | 12/3 | | 50' | 15.2 m | | 15 | 4 |
| 2559SW0003 | | | 100' | 30.5 m | | | 3 |



MULTI-OUTLET EXTENSION CORDS



Southwire heavy-duty extension cords have a thicker jacket than standard outdoor cords to withstand common jobsite wear and tear.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 voltage rating
- . Common applications: table saw, heat gun, work light





NEMA 5-15R

5-15P

SPECIFICATIONS

* Black Plugs

| STOCK # | GAUGE CONDUCTOR | JAKCET Type | LENGTH (FT) | LENGTH (M) | CORD COLOR | NUMBER OF OUTLETS | AMPS | CASE PACK QUANTITY |
|-----------|-----------------|----------------|-------------|------------|------------|----------------------|------|-----------------------|
| 90028802* | | | 6' | 1.8 m | Yellow | 3 | | 6 |
| 3130 | 14/3 | | 9' | 2.7 m | Black | 3 | | 4 |
| 90018802 | 14/3 | STW | 25' | 7.6 m | Yellow | 3 | 15 | 4 |
| 65038901 | | | 25' | 7.6 m | Black | 3 | | 2 |
| 65039101 | 12/3 | | 50' | 15.2 m | Black | 6 | | 2 |



PUSH-LOCK EXTENSION CORDS



Southwire push-lock extension cords keep your tools plugged in while doing common yard work.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 voltage rating
- Common applications: electric push mower, leaf blower, hedge trimmer





NEMA 5-15R

NEMA 5-15P

| STOCK # | GAUGE JAKCET CONDUCTOR TYPE | | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY | |
|----------|--------------------------------|------|-------------|------------|--------------|------|-----------------------|--|
| 24388826 | 14/0 | | 50' | 15.2 m | Yellow/Blue | 15 | 4 | |
| 24398826 | 14/3 | SJTW | 100' | 30.5 m | Yellow/Blue | 13 | 3 | |
| 25388828 | 12/3 | | 50' | 15.2 m | Yellow/Black | 15 | 4 | |



COLD WEATHER EXTENSION CORDS

Southwire Cold Weather Extension Cords are best used in sub-zero temperatures. Our cords are designed with special compounds in the outer jacket that stays flexible and prevents damage in freezing cold weather. We offer varieties of bright colors that are easily seen in the snow.





Typical extension cords become very hard to work with in the cold: the jackets will not flex and will hold their position, and in some cases, the jacket will become brittle and break, creating a loss in your your electrical connection or exposing copper and creating an unsafe working condition.

If you are working in a cold environment, you need the right cold weather extension cord for the job.





COLD FLEXTM



JACKET MATERIAL

TPE

JACKET TYPE

COLDFLEX SJTW

APPLICATION

GENERAL COLD WEATHER LESS FLEXIBLE IN EXTREME LOW TEMPERATURES

TEMPERATURE RANGE

-58°F TO 140°F

(-50°C TO 60°C)





JACKET MATERIAL

TPE

JACKET TYPE


SJEOOW

APPLICATION

COLD OR HOT OUTDOOR ENVIRONMENTS

TEMPERATURE RANGE

-58°F TO 221°F (-50°C TO 105°C)

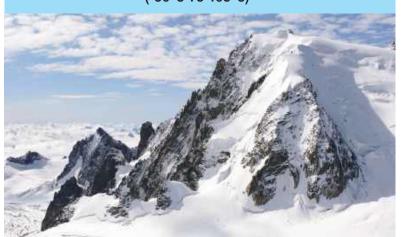



JACKET MATERIAL

PREMIUM TPE

JACKET TYPE

SJEOW

APPLICATION

EXTREME COLD OR HOT OUTDOOR ENVIRONMENTS

TEMPERATURE RANGE

-94°F TO 221°F (-70°C TO 105°C)



POLAR/SOLAR® SUPREME EXTENSION CORD



Polar/Solar® Supreme extension cords are formulated to offer superior jobsite performance in extremely cold weather.

- Temperature rating of -94°F to 221°F (-70°C to 105°C)
- 125 voltage rating
- · Abrasion, chemical and oil resistant
- Common applications: cable puller, chop saw, rotary hammer drill





5-15R

5-15P

| STOCK # | GAUGE CONDUCTOR | JACKET TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY |
|------------|--------------------|----------------|-------------|------------|------------|------|-----------------------|
| 1437SW0061 | | | 25' | 7.6 m | Blue/White | 15 | 12 |
| 1438SW0061 | 14/3 | 0.15014 | 50' | 15.2 m | | 15 | 6 |
| 1439SW0061 | | | 100' | 30.5 m | | 13 | 6 |
| 1637SW0061 | | SJE0W - | 25' | 7.6 m | | 15 | 12 |
| 1638SW0061 | 12/3 | | 50' | 15.2 m | | 15 | 6 |
| 1639SW0061 | 1 | | 100' | 30.5 m | | 15 | 4 |







POLAR/SOLAR® EXTENSION CORD



Polar/Solar® extension cords are built to stay flexible under the most extreme temperatures.

- Temperature rating of -58°F to 221°F (-50°C to 105°C)
- 125 voltage rating
- Abrasion, chemical and oil resistant
- Common applications: cable puller, chop saw, rotary hammer drill





NEMA 5-15R NEMA 5-15P

| STOCK # | GAUGE CONDUCTOR | JACKET Type | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY |
|------------|--------------------|----------------|-------------|------------|------------|------|-----------------------|
| 1287SW0002 | | | 25' | 7.6 m | | 13 | 12 |
| 1288SW0002 | 16/3 | SJEOW | 50' | 15.2 m | Yellow | 13 | 12 |
| 1289SW0002 |] | | 100' | 30.5 m | | 10 | 6 |
| 14840002 | | | 10' | 3 m | | 15 | 24 |
| 1487SW0002 | 14/3 | | 25' | 7.6 m | Yellow | 15 | 12 |
| 1488SW0002 | 14/3 | | 50' | 15.2 m | reliow | 15 | 12 |
| 1489SW0002 | | | 100' | 30.5 m | | 13 | 6 |
| 1427SW0008 | | | 25' | 7.6 m | | 15 | 12 |
| 1428SW0008 | 14/3 | 3 | 50' | 15.2 m | Black | 15 | 6 |
| 1429SW0008 | | | 100' | 30.5 m | | 13 | 6 |
| 1687SW0002 | | SJE00W | 25' | 7.6 m | | | 12 |
| 1688SW0002 | 12/3 | | 50' | 15.2 m | Yellow | | 6 |
| 1689SW0002 | | | 100' | 30.5 m | | | 4 |
| 1628SW0008 | 12/3 | | 50' | 15.2 m | Black | 15 | 6 |
| 1629SW0008 | 12/3 | | 100' | 30.5 m | DIACK | 15 | 4 |
| 1787SW0002 | | | 25' | 7.6 m | | | 6 |
| 1788SW0002 | 10/3 | | 50' | 15.2 m | Yellow | | 4 |
| 1789SW0002 | | | 100' | 30.5 m | | | 3 |







POLAR/SOLAR® SJEOOW TRIPTAP



Polar/Solar® extension cords are built to stay flexible under the most extreme temperatures.

- Temperature rating of -58°F to 221°F (-50°C to 105°C)
- 125 voltage rating
- · Abrasion, chemical and oil resistant
- Common applications: cable puller, chop saw, rotary hammer drill






NEMA 5-15R

NEMA 5-15P

SPECIFICATIONS

| STOCK # | GAUGE CONDUCTOR | JAKCET Type | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY |
|------------|-----------------|----------------|-------------|------------|------------|------|-----------------------|
| 3487SW0002 | | SJE00W | 25' | 7.6 m | Yellow | 15 | 12 |
| 3488SW0002 | 12/3 | | 50' | 15.2 m | | | 6 |
| 3489SW0002 | | | 100' | 30.5 m | | | 4 |
| 3588SW0002 | 10/3 | | 50' | 15.2 m | | | 4 |
| 3589SW0002 | 10/3 | | 100' | 30.5 m | | | 3 |

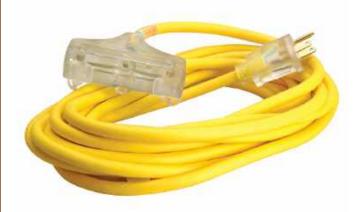



POLAR/SOLAR® SEOOW TRIPTAP

| STOCK # | GAUGE CONDUCTOR | JAKCET Type | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY |
|------------|--------------------|----------------|-------------|------------|------------|------|-----------------------|
| 3482SW8802 | 12/3 | SE00W | 2' | 0.61 m | Yellow | 15 | 15 |

POLAR/SOLAR® SEOOW HEAVY-DUTY OUTDOOR EXTENSION CORDS



Polar/Solar® extension cords are built to stay flexible under the most extreme temperatures.


- Temperature rating of -58°F to 221°F (-50°C to 105°C)
- 125 voltage rating
- Abrasion, chemical and oil resistant
- Common applications: cable puller, chop saw, rotary hammer drill





NEMA 5-15R NEMA 5-15P

| STOCK # | GAUGE CONDUCTOR | JACKET TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY |
|------------|--------------------|----------------|-------------|------------|------------|------|-----------------------|
| 1567SW0002 | | /3 SE00W | 25' | 7.6 m | Yellow | 15 | 6 |
| 1568SW0002 | 14/3 | | 50' | 15.2 m | | 15 | 4 |
| 1569SW0002 | | | 100' | 30.5 m | | 13 | 3 |
| 1767SW0002 | | 3LUUW [| 25' | 7.6 m | | 15 | 6 |
| 1768SW0002 | 12/3 | | 50' | 15.2 m | | | 4 |
| 1769SW0002 | | | 100' | 30.5 m | | | 3 |

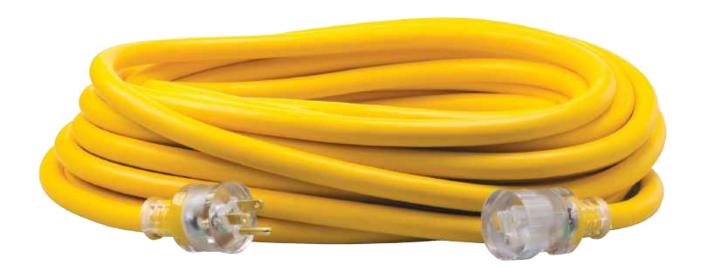

COLDFLEX™ OUTDOOR EXTENSION CORDS



ColdFlex™ extension cords withstand harsh, winter temperatures, and have a highly visible bright blue jacket to increase safety.

- Temperature rating of -58°F to 140°F (-50°C to 60°C)
- 125 voltage rating
- Common applications: snow thrower, electric chainsaw, work light





NEMA 5-15R

EMA NEMA -15R 5-15P

| STOCK # | GAUGE CONDUCTOR | JAKCET TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY |
|------------|--------------------|------------------|-------------|------------|------------|------|-----------------------|
| 2367SW8806 | | | 25' | 7.6 m | | 13 | 12 |
| 2368SW8806 | 16/3 | | 50' | 15.2 m | Blue | 13 | 12 |
| 2436 | | | 100' | 30.5 m | | 10 | 6 |
| 2467SW8806 | | | 25' | 7.6 m | | 15 | 6 |
| 2468SW8806 | 14/3 | ColdFlex SJTW | 50' | 15.2 m | | 15 | 6 |
| 2469SW8806 | | | 100' | 30.5 m | | 13 | 3 |
| 2437 | | | 25' | 7.6 m | | 15 | 12 |
| 2568SW0006 | 12/3 | | 50' | 15.2 m | | 15 | 3 |
| 2569SW0006 | | | 100' | 30.5 m | | 15 | 4 |



COLDFLEX™ TRITAP OUTDOOR EXTENSION CORDS



ColdFlex™ extension cords withstand harsh, winter temperatures, and have a highly visible bright blue jacket to increase safety.

- Temperature rating of -58°F to 140°F (-50°C to 60°C)
- 125 voltage rating
- Common applications: snow thrower, electric chainsaw, work light





| STOCK # | GAUGE CONDUCTOR | JAKCET TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY | |
|----------|--------------------|----------------|-------------|------------|------------|------|-----------------------|--|
| 32678806 | 14/2 | 0.1.5 | 25' | 7.6 m | Blue | 15 | | |
| 32688806 | 14/3 | ColdFlex SJTW | 50' | 15.2 | | | 6 | |
| 41688806 | 12/3 | SJIW | | | | | | |



TWIST LOCK 8-GENERATOR EXTENSION CORDS


Southwire Twist Lock Extension Cords have a unique blade design that allows the cords to lock into receptacles or outlets with a simple twist action. We offer a vast selection of Generator Extension Cords with different amperage levels for different needs.



TWIST LOCK & GENERATOR

Having the right plug and receptacle is essential to getting the job done. Southwire has a broad assortment of cords and adapters to help you deliver power to where you need it as efficiently as possible.

COMMON GENERATOR NEMA CONFIGURATIONS

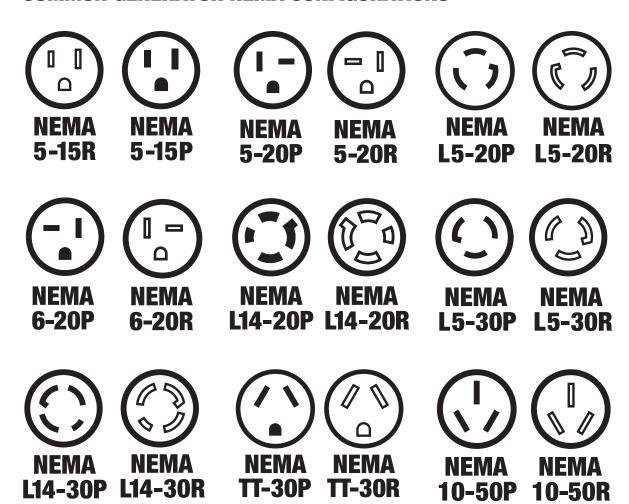

When considering what generator cables and adapters you need for a project, you want to avoid voltage drop from the generator. To do this, utilize as short a cable as possible, along with the largest conductor (smallest AWG) and a connector with as high amperage and voltage rating possible. For instance, you will get less power and greater voltage drop out of a generator using a 100' 15 amp 12/3 extension cord with 5-15 plugs compared to a 50' 20 amp 10/3 extension cord with a 5-20 plug.

TWIST LOCK & GENERATOR

L5-20 TWIST LOCK EXTENSION CORDS



Southwire twist lock extension cords are designed to keep your jobsite under continuous operation.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 voltage rating
- · Common applications: generator, pool pump
- NEMA L5-20P



SPECIFICATIONS

| STOCK # | GAUGE CONDUCTOR | JACKET TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY | NEMA PLUG | NEMA RECEPTACLE |
|------------|--------------------|----------------|-------------|------------|---------------|------|-----------------------|----------------|--------------------|
| 9208SW8802 | | SJTW | 50' | 15.2 m | Yellow | 20 | 6 | (| |
| 90288802 | | STW | 50 | 15.2 111 | | | 4 | NEMA L5-20P | ((() |
| 9209SW8802 | 12/3 | SJTW | | 30.5 m | | 15 | | | |
| 9029SW8802 | | STW | 100' | | | | 3 | | NEMA L5-20R |
| 92390008 | | SE00W | | | Black | | | | 20 2011 |

L14-30 TWIST LOCK EXTENSION CORDS



Southwire twist lock extension cords are designed to keep your jobsite under continuous operation.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 voltage rating
- Common applications: generator, pool pump
- NEMA L14-30P



| STOCK # | GAUGE CONDUCTOR | JACKET TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY | NEMA PLUG | NEMA RECEPTACLE |
|----------|--------------------|----------------|-------------|------------|---------------|------|-----------------------|-----------------|--------------------|
| 65172740 | | | 10' | 3.05 m | Yellow | 30 | 6 | NEMA L14-30P | |
| 65172840 | | STW | 20' | 6.1 m | | | 6 | | |
| 65038801 | 10/4 | | 25' | 7.6 m | Black | | 2 | | |
| 65173040 | | | 40' | 12.19 m | Yellow | | 6 | | NEMA L14-30R |
| 65173140 | | | 50' | 15.24 m | | | 2 | | L14-3011 |

TWIST LOCK & GENERATOR

GENERATOR ADAPTERS CONVERT TO 20A (5-20R)



Southwire generator adapters provide more usable receptacles during temporary power outages and on jobsites.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 voltage rating

| STOCK # | GAUGE CONDUCTOR | JACKET TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY | NEMA PLUG | NEMA RECEPTACLE |
|----------|--------------------|----------------|-------------|------------|---------------|------|-----------------------|-----------------|-------------------------------|
| 19158802 | 10/3 | | | | | 15 | | NEMA L5-30P | |
| 19248802 | 12/4 | | | | Yellow | 20 | | NEMA L14-20P | NEMA 5-20R Lighted |
| 19348802 | 10/4 | STW | 3, | 0.9 m | | 20 | 4 | NEMA L14-30P | |
| 65038601 | 10/4 | | | | Black | 20 | | NEMA L14-30P | NEMA 5-20R (x2) Lighted |

TWIST LOCK & GENERATOR

TWIST LOCK ADAPTERS



Southwire twist-to-lock adapters easily convert plugs and receptacles to fit your specific application.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 voltage rating
- Common applications: generator, pool pump

| STOCK # | GAUGE CONDUCTOR | JACKET TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY | NEMA PLUG | NEMA RECEPTACLE | | |
|----------|--------------------|----------------|-------------|------------|---------------|-------|-----------------------|-----------------|---------------------------------|----------------|---------------------|
| 90208802 | | | 9'' | 0.2 m | | 15-20 | | NEMA 5-15P | NEMA L5-20R | | |
| 90218802 | | | 9'' | 0.2 m | | 15-20 | 10 | | NEMA 5-15R | | |
| 90228802 | 12/3 | | 20" | 0.5 m | Yellow | 20 | 10 | $\widehat{(r)}$ | NEMA L5-20R (x2) | | |
| 90238802 | | STW | STW | STW | 2' | 0.6 m | 0.6 m 20 | 20 | | NEMA L5-20P | NEMA L5-20R (x3) |
| 90848802 | | | 2' | 0.6 m | | 15 | 6 | | NEMA 5-15R Lighted Tritap | | |
| 19148802 | 10/3 | | 3' | 0.91 m | Yellow | 20-30 | 4 | NEMA L5-30P | NEMA L5-20R (x2) | | |
| 18640008 | 10/4 | | | 3.05 m | Black | 50 | 4 | NEMA 14-50P | NEMA L14-30R | | |
| 18540008 | 10/4 | SE00W | 10' | 3.05 m | DIAUN | 30 | 4 | NEMA L14-30P | NEMA L14-30R | | |

TWIST LOCK & GENERATOR

5-15 ADAPTERS



Southwire adapters transform your single outlet into multiple outlets.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 voltage rating
- . Common applications: generator, rv

SPECIFICATIONS

*Black plugs

| STOCK # | GAUGE CONDUCTOR | JACKET TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY | NEMA PLUG | NEMA RECEPTACLE |
|-----------|--------------------|----------------|-------------|------------|---------------|------|-----------------------|--------------|--------------------|
| 90188802* | 12/3 | STW | 2' | 0.6 m | Yellow | 15 | 12 | NEMA | NEMA 5-15R (x2) |
| 90198802* | 12/3 | SIW | 2 | 0.0 111 | Tellow | 13 | 12 | 5-15P | NEMA 5-15R (x3) |

SPECIALTY EXTENSION CORDS & POWER DELIVERY

Southwire specialty cords provide a broad assortment of cables to suit your needs. These cords are designed to resist damage against high- powered machinery while also being oil, solvent, and water resistant.





OIL-RESISTANT RUBBER

JACKET TYPE

SJOOW

APPLICATION

HARSH GARAGE **& WELDING ENVIRONMENTS**

TEMPERATURE RANGE

-40°F TO 195°F (-40°C TO 60°C)





JACKET MATERIAL

OIL-RESISTANT VINYL

JACKET TYPE

SJEOW/SJOW/SJTOW


APPLICATION

HARSH GARAGE & AGRICULTURAL **ENVIRONMENTS**

TEMPERATURE RANGE

-40°F TO 140°F (-40°C TO 91°C)



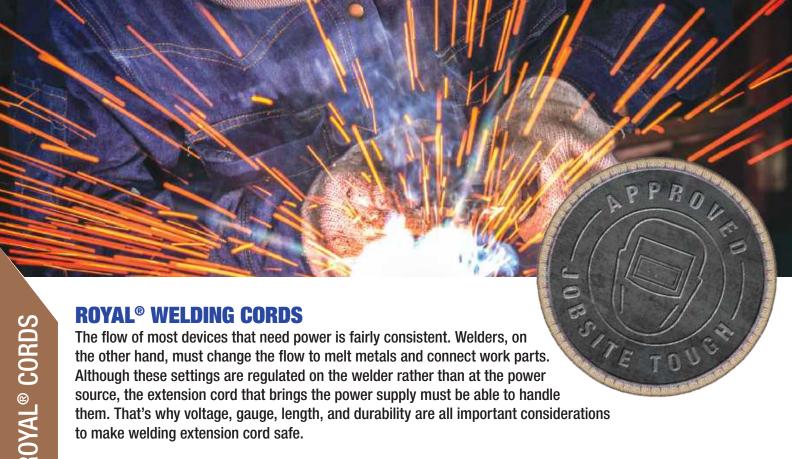

Southwire's Royal welding cords are specifically designed to resist damage from slag while also being oil, solvent, and water resistant.



ROYAL® OUTDOOR EXTENSION CORDS



Royal® extension cords are resistant to welding slag and are the most flexible extension cord on the market.

- Temperature rating of -40°F to 194°F (-40°C to 90°C)
- 125 voltage rating
- · Abrasion, chemical, and oil resistant
- Common applications: welder, angle grinder, rotary hammer drill





NEMA 5-15R

NEMA 5-15P

| STOCK # | GAUGE CONDUCTOR | JACKET TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY | | | |
|------------|--------------------|--------------------|-------------|------------|------------|--------|-----------------------|-----|------|-------|
| 3677SW0008 | | | 25' | 7.6 m | Black | | 12 | | | |
| 3687SW0002 | | | 25 | 7.0111 | Yellow | | 12 | | | |
| 3676SW0008 |] | 0.100.0 | CIOOM | 40' | 12.19 m | Black | | 6 | | |
| 3678SW0008 | 10/2 | | | SJOOW | C IOOM | C IOOM | CIOOM | 50' | 15.0 | Black |
| 3688SW0002 | 12/3 | 2300W | 50 | 15.2 m | V II | 15 | 6 | | | |
| 3680SW0008 |] | 80' 24.38 m Yellow | | Yellow | | 3 | | | | |
| 3679SW0008 | 100' 30.5 m | | | 4 | | | | | | |
| 3689SW0002 |] | | 100 | 30.5 III | Yellow | | 4 | | | |







6-50 WELDER EXTENSION CORD

19178806



Southwire twist lock extension cords are designed to keep your jobsite under continuous operation.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 voltage rating
- · Common applications: generator, pool pump
- NEMA 6-50R/6-50P

SPECIFICATIONS

| STOCK # | GAUGE CONDUCTOR | JACKET TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY | NEMA PLUG | NEMA RECEPTACLE |
|----------|--------------------|----------------|-------------|------------|---------------|------|-----------------------|---------------|--------------------|
| 19178806 | 0/2 | STIM | 25' | 7.6 m | Plue | 40 | 2 | (·) | |
| 19228806 | 8/3 | STW - | 50' | 15.2 m | Blue | 40 | 2 | NEMA 6-50P | NEMA 6-50R |

WELDING PLUG ADAPTER

| STOCK # | GAUGE CONDUCTOR | JACKET TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY | NEMA PLUG | NEMA RECEPTACLE |
|----------|--------------------|----------------|-------------|------------|---------------|------|-----------------------|----------------|--------------------|
| 19408808 | 8/3 | STW | 1.5' | 0.46 m | Black | 40 | 12 | NEMA 14-50P | NEMA 6-50R |



AGRIPRO™ CORDS

Oil Resistant Cords (SJTOW) are designed to withstand harsh conditions where fuel and fertilizers are often used. When basic SJTW cords come into contact with common chemicals, they can swell and become brittle.





AGRIPRO™ OIL RESISTANT EXTENSION CORD



Agri-Pro™ extension cords are ideal for farm, ranch, and workshop jobs.

- Temperature rating of -58°F to 221°F (-50°C to 105°C)
- 125 voltage rating
- Abrasion, chemical and oil resistant
- · Common applications: air compressor, chop saw, electric chain saw





NEMA 5-15R

NEM/ 5-15F

| STOCK # | GAUGE CONDUCTOR | JACKET TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY |
|----------|--------------------|----------------|-------------|------------|------------|------|-----------------------|
| 12270008 | 16/3 | SJE0W - | 25' | 7.6 m | | 13 | 12 |
| 12280008 | 10/3 | SJEUW | 50' | 15.2 m | | 13 | 12 |
| 64815701 | | | 25' | 7.6 m | | 15 | 12 |
| 64816001 | 14/3 | | 50' | 15.2 m | | 10 | 6 |
| 64816301 | | | 100' | 30.5 m | | 13 | 4 |
| 67729001 | | | 25' | 7.6 m | Black | | 12 |
| 64816901 | 12/3 | SJT0W | 50' | 15.2 m | | | 6 |
| 64817201 | | | 100' | 30.5 m | | 15 | 4 |
| 64817501 | | [| 25' | 7.6 m | | 15 | 6 |
| 64817801 | 10/3 | | 50' | 15.2 m | | | 4 |
| 64818101 | | | 100' | 30.5 m | | | 3 |







AGRIPRO™ 3-OUTLET OIL RESISTANT EXTENSION CORD



Agri-Pro™ extension cords are ideal for farm, ranch, and workshop jobs.

- Temperature rating of -58°F to 221°F (-50°C to 105°C)
- 125 voltage rating
- · Abrasion, chemical and oil resistant
- Common applications: air compressor, chop saw, electric chain saw





5-15R

SPECIFICATIONS

* Lighted Banana Receptacle ** Rated for Indoor Use

| STOCK # | GAUGE CONDUCTOR | JACKET TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY |
|---------------|-----------------|----------------|-------------|------------|------------|------|-----------------------|
| 54533501 * ** | 14/3 | SJOW | 15' | 4.6 m | Black | 15 | 18 |

AGRIPRO™ TRITAP OIL RESISTANT EXTENSION CORD



Agri-Pro[™] extension cords are ideal for farm, ranch, and workshop jobs.

- Temperature rating of -58°F to 221°F (-50°C to 105°C)
- 125 voltage rating
- Abrasion, chemical and oil resistant
- · Common applications: air compressor, chop saw, electric chain saw





5-15R

5-15P

| STOCK # | GAUGE CONDUCTOR | WIRE TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY |
|---------|-----------------|--------------|-------------|------------|------------|------|-----------------------|
| 2451 | 14/3 | SJTOW | 25' | 7.6M | Black | 15 | 12 |

12/3 FLAT CONVENTION CENTER CORDS



- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 voltage rating
- Flat cable construction makes it ideal for passing under carpets at temporary events





NEMA 5-15R NEMA 5-15P

SPECIFICATIONS

*-40°F to 140°F (-40°C to 60°C) * 125V * Flat cable construction makes it ideal for passing under carpets at temporary events

| STOCK # | GAUGE CONDUCTOR | JAKCET TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY |
|----------|-----------------|----------------|-------------|------------|------------|------|-----------------------|
| 64825001 | | | 15' | 4.6 m | | | 12 |
| 64828101 | 12/3 | SJT | 25' | 7.6 m | Black | 15 | 12 |
| 64828401 | | | 50' | 15.2 m | | | 6 |

RANGE - DRYER - APPLIANCE - REPLACEMENT CORDS

Southwire offers a variety of in-home replacement cords providing multiple options for different plug configurations, and strain relief clamps help prevent cord damage.



RANGE AND DRYER CORDS

9014SW8809



- Temperature rating of -4°F to 140°F (-20°C to 60°C)
- 125/250 voltage rating

SPECIFICATIONS

| STOCK # | GAUGE CONDUCTOR | JAKCET TYPE | NUMBERS OF WIRES | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY | NEMA Plug |
|------------|--------------------|----------------|---------------------|-------------|------------|---------------|------|-----------------------|----------------|
| 9014SW8809 | 6/2-8/1 | SRDT Flat | 3 | 4' | 1.2 m | Gray | | 6 | (1) |
| 9016SW8809 | 0/2-0/1 | ShDT Flat | 3 | 6' | 1.8 m | ulay | 50 | 6 | NEMA 10-50P |
| 9044SW8808 | 6/2-8/2 | SDRT Round | 4 | 4' | 1.2 m | | | 6 | \bigcirc |
| 9046SW8808 | 0/2-8/2 | SDRT ROUNG | 4 | 6' | 1.8 m | | | 6 | |
| 544094 | 8/2-10/2 | | 4 | 5' | | | 40 | 8 | NEMA |
| 544147 | 0/2-10/2 | | 4 | 5' | | | 40 | 15 | 14-50P |
| 544120 | 10/2 | DRT | 3 | 5' | 1.5 m | Black | 30 | 8 | NEMA 14-30P |
| 544150 | 10/2 | | 3 | 5' | | | 40 | 15 | NEMA 14-50P |
| 9124SW8809 | 10/3 | SDRT Flat | 3 | 4' | 1.2 m | Gray | 30 | 6 | (,) |
| 9126SW8809 | 10/3 | SUNT FIAL | 4 | 6' | 1.8 m | uray | 30 | 6 | NEMA 10-30P |
| 9154SW8808 | 10/4 | CDDT Dd | 4 | 4' | 1.2 m | Disale | 30 | 6 | |
| 9156SW8808 | 10/4 | SDRT Round | 4 | 6' | 1.8 m | Black | 30 | 6 | NEMA 14-30P |

ELECTRIC OUTLET GAS RANGE ADAPTER 250V TO 125V

9042SW8801



- Converts a 220V Outlet to 120V
- Commonly used when installing an electric range where a gas range previously worked
- · Helps avoid re-wiring an outlet in a home

| STOCK # | COLOR | AMPS | CASE PACK QUANTITY | NEMA PLUG | NEMA RECEPTACLE |
|------------|------------------------------|------|--------------------|----------------|-----------------|
| 9042SW8801 | White with Black Pull Handle | 15 | 4 | NEMA 14-50P | NEMA 5-15R |

GARAGE & WORKSHOP REPLACEMENT POWER SUPPLY CORDS



- Temperature rating of:
 - SJEOW -58°F to 221°F (-50°C to 105°C)
 - SJT -40°F to 140°F (-40°C to 60°C)
 - SEOOW -58°F to 221°F (-50C to 105°C)
- 125 voltage rating
- Common applications: electric trimmer, electric chainsaw, air compressor



SPECIFICATIONS

| STOCK # | GAUGE CONDUCTOR | JAKCET TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY |
|------------|--------------------|----------------|-------------|------------|------------|------|-----------------------|
| 9853SW0008 | 10/0 | SJE0W - | 6' | 1.8 m | | | 50 |
| 9854SW0008 | 16/2 | SJEUW | 9' | 2.7 m | | | 50 |
| 98388808 | | SJT | 2.5' | 0.7 m | | 13 | 100 |
| 9855SW0008 | 16/3 | | 6' | 1.8 m | | | 50 |
| 9856SW0008 | | SJEOW | 9' | 2.7 m | Black | | 50 |
| 9857SW0008 | 14/3 | SJEUW | 6' | 1.8 m | | | 25 |
| 9858SW0008 | 14/3 | | 9' | 2.7 m | | 15 | 25 |
| 90110008 | 12/3 | SE00W | 2' | 0.6 m | | 15 | 50 |
| 90120008 | 12/3 | SEUUW | 2' | 0.6 m | | | 50 |

INDOOR ROUND REPLACEMENT POWER SUPPLY CORDS



- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 voltage rating
- · Common applications: vacuum, electric drill, work light



| STOCK # | GAUGE CONDUCTOR | JAKCET TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY |
|------------|--------------------|----------------|-------------|------------|------------|------|-----------------------|
| 9702SW8808 | 16/2 | | 6' | 1.8 m | | | |
| 9703SW8808 | | | 3' | 0.9 m | | 13 | 25 |
| 9706SW8808 | 16/3 | C ITM | 6' | 1.8 m | Disale | 13 | |
| 9709SW8808 | | SJTW - | 9' | 2.7 m | Black | | |
| 9716SW8808 | 14/0 | | 6' | 1.8 m | | 45 | |
| 9719SW8808 | 14/3 | | 9' | 2.7 m | | 15 | |

INDOOR FLAT REPLACEMENT POWER SUPPLY CORDS



- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 Voltage rating
- Common applications: microwave, refrigerator, dehumidifier



| STOCK # | GAUGE CONDUCTOR | JAKCET Type | NUMBERS OF WIRES | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY |
|------------|--------------------|----------------|---------------------|-------------|------------|---------------|------|-----------------------|
| 9723SW8809 | | | Right Angle | 3' | 0.9 m | | | |
| 9733SW8809 | | | Straight | 3' | 0.9 m | | | |
| 9724SW8809 | 16/3 | | Right Angle | 4' | 1.2 m | Gray | 13 | |
| 9734SW8809 | 10/3 | | Straight | 4' | 1.2 m | ulay | 13 | |
| 9726SW8809 | | | Right Angle | 6' | 1.8 m | | | |
| 9736SW8809 | | | Straight | 6' | 1.8 m | | | |
| 9743SW8823 | | SPT-3 | Straight | 3' | 0.9 m | Beige | | 25 |
| 9743SW09 | 14/3 | | Straight | 3' | 0.9 m | Gray | 15 | |
| 9746SW8823 | | | Straight | 6' | 1.8 m | Beige | | |
| 98700009 | 12/3 | | Right Angle | 6' | 1.8 m | Beige | | |

125V INDOOR MAJOR APPLIANCE REPLACEMENT CORDS



- Temperature rating of -4°F to 140°F (-20°C to 60°C)
- 125 voltage rating (250 voltage rating for 3537SW8809)
- · Common applications: air conditioner, space heater, refrigerator





NEMA 5-15R **NEMA** 5-15P

SPECIFICATIONS

| STOCK # | GAUGE CONDUCTOR | JAKCET TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY |
|------------|--------------------|----------------|-------------|------------|---------------|------|-----------------------|
| 3531SW3323 | | ĺ | 3' | 0.9 m | Beige | | 36 |
| 3531SW09 | | | 3' | 0.9 m | Gray | | 24 |
| 3532SW3323 | | | 6' | 1.8 m | Beige | | 24 |
| 3532SW09 | 14/3 | SPT-3 | 6' | 1.8 m | Gray | 15 | 24 |
| 3533SW3323 | | | 9' | 2.7 m | Beige | | 15 |
| 3535SW3323 | | | 12' | 3.7 m | Beige | | 12 |
| 3536SW3323 | | | 15' | 4.6 m | Beige | | 12 |

250V INDOOR MAJOR APPLIANCE REPLACEMENT CORDS



- Temperature rating of -4°F to 140°F (-20°C to 60°C)
- 125 voltage rating (250 voltage rating for 3537SW8809)
- Common applications: air conditioner, space heater, refrigerator





NEMA 6-20P

NEMA 6-20R

SPECIFICATIONS

* (*6-20 P/R)

| STOCK # | GAUGE CONDUCTOR | JAKCET Type | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY |
|-------------|--------------------|----------------|-------------|------------|---------------|------|-----------------------|
| 3537SW8809* | 12/3 | SPT-3 | 9' | 2.7 m | Gray | 20 | 18 |

CORD MANAGEMENT & REELS

Southwire cord organization options for keeping bulky extension cords, ropes, and holiday lighting tangle free.



CORD MANAGEMENT | STORAG

*with metal stand

CORD MANAGEMENT

CORD ORGANIZATION CORD STORAGE WRAPS



SPECIFICATIONS

| STOCK # | DESCRIPTION | HOLDS | COLOR | CASE PACK QUANTITY |
|----------|---|-------------------------|--------|-----------------------|
| 64827501 | Resin Cord Wrap With Stand | 100' of 14/3 Gauge Cord | Yellow | 10 |
| 2803 | Black, Mountable H-Frame Extension Cord Reel | 100' of 16/3 gauge cord | Black | 12 |
| 64827801 | Resin Cord Wrap With Integrated Tritap Adapter | 50' of 14/3 Gauge Cord | Black | 3 |
| E101 | Yellow, Mountable Cord Storage Extension Cord Reel | 100' of 16/3 gauge cord | Yellow | 24 |
| 502805 | Black Cord Caddy H-Rack Tray Pack | 50' of 14/3 gauge cord | Black | 24 |

CORD STORAGE REEL



| STOCK # | DESCRIPTION | HOLDS | COLOR | CASE PACK QUANTITY |
|----------|--|--|--------------|-----------------------|
| E102 | Extension Cord Storage Reel | 150' Of 16/3, 125' Of 14/3, And 75' Of 12/3 | Red/Black | 8 |
| 22849* | Extension Cord Reel With Metal Stand | Holds 100' Of 14/3 Gauge Cords | Black | 6 |
| 64827201 | Black, Extension Cord Storage Wheel | 150' of 16/3 , 125' of 14/3, 75' of 12/3 | Black | 8 |
| E103 | Extension Cord Storage Wheel | Holds 125' Of 14/3 Gauge Cord | Red/Black | 4 |
| E230* | Resin Reel With Metal Stand And Four Grounded Outlets | 50' of 12/3 Gauge Cord | Black/Yellow | 4 |
| 547702 | Extension Cord Storage Wheel | 150' of 16/3 Gauge Cord | Black | 8 |

CORD MANAGEMENT

CORD REELS









| STOCK # | DESCRIPTION | GAUGE CONDUCTOR | WIRE TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | CASE PACK QUANTITY |
|---------|--|--------------------|--------------|-------------|------------|------------------------|-----------------------|
| E235 | Power Station Cord Reel With Metal Stand, 6 Grounded Outlets, And On Off Switch And Built In Circuit Breaker | | SJTW | 50' | 15.2 m | Red/Black/ Yellow | 2 |
| E238 | Power Station Cord Reel With Metal Stand, 6 Grounded Outlets, And On Off Switch And Built In Circuit Breaker | 12/3 | SJTW | 50' | 15.2 m | Green/Black/ Yellow | 2 |
| E231 | Retractable Extension Cord Reel, 4 Grounded outlets and On Off switch | 16/3 | SJTW | 20' | 6.1 m | Black/Yellow | 6 |
| 2801 | Portable Extension Cord Reel Power Station, 4 Grounded Outlets | 16/3 | SJT | 25' | 7.6 m | Black/Yellow | 3 |
| 4907 | Extension cord Reel with 4 Grounded Outlets | 16/3 | SJTW | 25' | 7.6 m | Black/Yellow | 4 |
| 545794 | Cord Caddy Self-Storing Extension Cord with 4 Grounded Outlets | 16/3 | SJTW | 32.81' | 10 m | Orange | 6 |

CORD MANAGEMENT | RETRACTABLE

CORD MANAGEMENT

RETRACTABLE CORD REELS WITH LIGHTED TRITAP



SPECIFICATIONS

*Black Tri-Tap ^Banana Plug

| STOCK # | DESCRIPTION | GAUGE CONDUCTOR | WIRE TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | OUTLETS | AMPS | CASE PACK QUANTITY |
|------------|---|--------------------|--------------|----------------|---------------|---------------|---------|------|-----------------------|
| E315 | Retractable Extension Cord Reel | 16/3 | SVT | 20' | 6.1 m | Black/Yellow | 3 | 13 | 4 |
| E215^ | Metal Retractable Extension Cord Reel With Lighted End | 16/3 | SJT | 30' | 9.1 m | Silver/Black | 3 | 13 | 2 |
| 48006SW* | Metal Retractable Extension Cord Reel | 14/3 | SJTW | 30' | 9.1 m | Red/Black | 3 | 15 | 3 |
| 48208802SW | Retractable Extension Cord Reel With Lighted End | 12/3 | SJTW | 50' | 15.2 m | Black/Yellow | 3 | 13 | 1 |

CORD MANAGEMENT

RETRACTABLE CORD REEL WITH LOCKING PLUG



SPECIFICATIONS

| STOCK # | DESCRIPTION | GAUGE CONDUCTOR | WIRE TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | OUTLETS | AMPS | CASE PACK QUANTITY |
|---------|---|--------------------|--------------|----------------|---------------|---------------|---------|------|-----------------------|
| 48004 | Metal Retractable Extension Cord Wheel With Locking Plug | 14/3 | SJTW | 30' | 9.1 m | Red/Black | 1 | 15 | 3 |

INDUSTRIAL RETRACTABLE CORD REELS







SPECIFICATIONS

*with GFCI

| STOCK # | GAUGE CONDUCTOR | WIRE TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | OUTLETS | AMPS | CASE PACK QUANTITY |
|-------------|--------------------|--------------|----------------|---------------|---------------|---------|------|-----------------------|
| R112318845 | | | | | | 1 | 20 | |
| R112718845* | 12/3 | SJEOW | 45' | 13.7 m | Yellow/Black | 2 | 20 | 1 |
| R112308845 | | | | | | 1 | 15 | |

NOTES

NOTES

| |
|------|
| |
| |
| _ |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |





/SOUTHWIRETOOLS



/SOUTHWIRE-COMPANY



@SOUTHWIRETOOLS



@SOUTHWIRE



WWW.SOUTHWIRE.COM | 1-855-SWTOOLS

All Trademarks or Registered Trademarks (TM/ \odot) are owned or licensed by Southwire Company. Any other $^{TM}/\odot$ -Trademark or Registered Trademark of Southwire Company.